



TECHNICAL SPECIFICATIONS

- Power supply: 230V AC < 16W
- 1PH 50/60 Hz
- 3A volt-free alarm wires, N.O, N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Water flow rate: 10 litres/hour at zero head
- Maximum recommended head: 10 metres
- 21dB(A) @ 1 metre head
- Fully potted
- Thermally protected
- CE marked

MINI AQUA PERFORMANCE

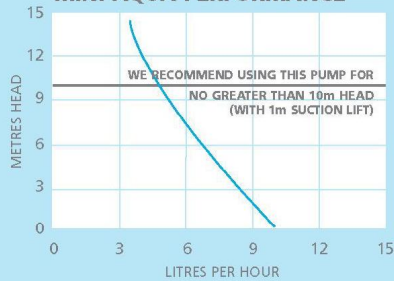

SYSTEM LOCATION

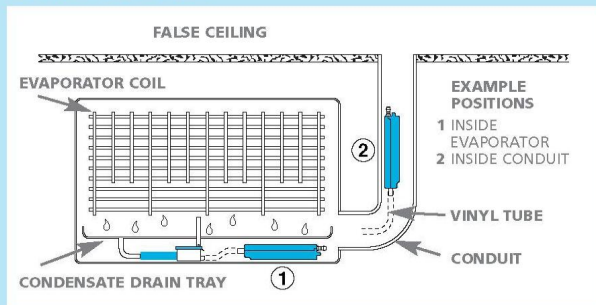

PUMP DIMENSIONS

Product	Height	Width	Depth	Weight
MINI AQUA	28mm	165mm	28mm	0.18kg



FP 2406

Mini Aqua

The Mini Aqua is the latest addition to the Aspen family of mini pumps, and has been designed to give the installation flexibility, where the latest generation of A/C units are becoming even smaller.

The Mini Aqua is designed to be installed:

- within wall mounted evaporators
- in plastic conduit

By connecting the drain hose to the reservoir and placing the pump drive unit within the evaporator or conduit, condensate water can be pumped to a height of 8 metres.

Using the proven functionality of our other mini pumps, the Mini Aqua is also incredibly slim in size.

Measuring only 28mm in height and 28mm in depth, it is probably the smallest condensate pump in the world!



ACTUAL SIZE