

TECHNICAL SPECIFICATIONS

- **Mini Lime** Power supply: 230V - 16W
- **Maxi Lime** Power supply: 230V - 16W
- 1PH 50 Hz
- 3A volt-free alarm wires, N.O, N.C. contacts rated @ 5A inductive at 230V
- Hall effect semi conductor level sensors, with high level safety
- Fully potted
- Thermally protected
- CE marked

Mini Lime



- Water flow rate: 11ltrs/hour at zero head
- Maximum recommended head: 10 metres
- 23dB(A) @ 1 metre head

Maxi Lime

- Water flow rate: 34ltrs/hour at zero head
- Maximum recommended head: 15 metres
- 35dB(A) @ 1 metre head



MAXI LIME

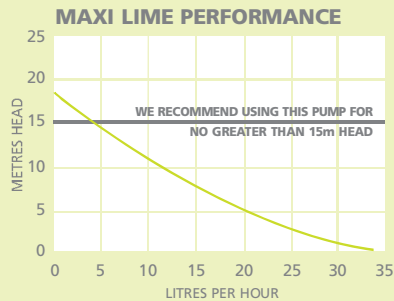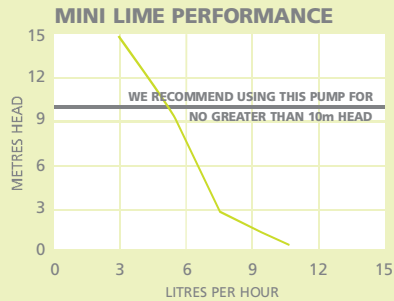

PUMP DIMENSIONS

Product	Height	Width	Depth	Weight
MINI LIME	79mm	99mm	44mm	0.31kg
MAXI LIME	115mm	99mm	44mm	0.47kg



Mini Lime & Maxi Lime

The Aspen Mini & Maxi Lime pumps are completely unique, in both their design and installation advantages. The pumps are clipped directly onto the reservoir so there is minimal suction lift. By connecting the drain hose to the reservoir of the pump unit, condensate water can be pumped away to a suitable drain.

The pumps fit securely into a specifically designed elbow that holds them horizontally to ensure reliable operation. The pump and elbow are reversible therefore they can be installed easily on either side of an evaporator unit.

The Lime system makes installation easy by providing a pump complete with the conduit trunking, in which the pump and all pipework are hidden. This system allows easy access for maintenance and ensures that the reservoir is level at all times.

- **Completely reversible**
- **Quick and easy to install**

Simple...

1. **Select Mini or Maxi Lime**
2. **Choose from the 5 trunking ranges available** (see next page)