


VORT PRESS® LL STANDARD RANGE

LONG LIFE

30.000 h


- For the ventilation of medium-sized or large rooms in commercial applications plus bathrooms/showers/toilets/utilities and kitchens in domestic situations.
- Four models with or without timers.
- "Intelligent" timer turns the unit on for approximately 40 sec. after the activation. When switched off, the unit continues to operate at the minimum speed for between 30 sec. and 30 min. (depending on the setting).
- Motor with ball bearings (guaranteed 30,000 hours of continuous operation) with thermal cut-out.
- Two speed unit.
- IMQ information label certifies third party product data and performance.
- Double motor-fan housing, anti-vibration supports and backdraught shutter for silent operation.
- Conforms to the following standard: CEI EN 60335-2-80 (Part 2: Particular requirements for fans).

Design: F. Trabucco - M. Vecchi

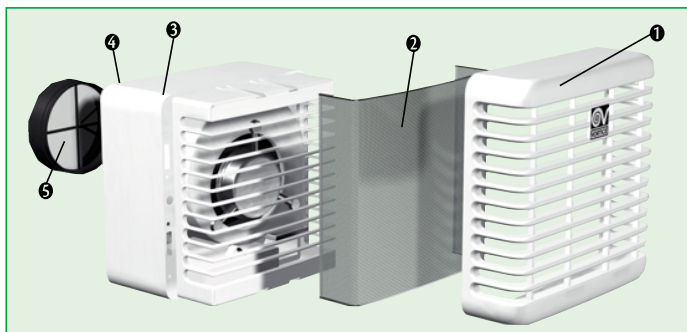

- 1 Front grille.
- 2 Metallic filter which can be removed and washed (dishwasher safe).
- 3 Made of rigid synthetic resin to guarantee high durability.
- 4 100 mm dia. outlet spigot.
- 5 Silicon backdraught shutter to avoid back-flow when the unit is turned off.

Dimensions (mm)

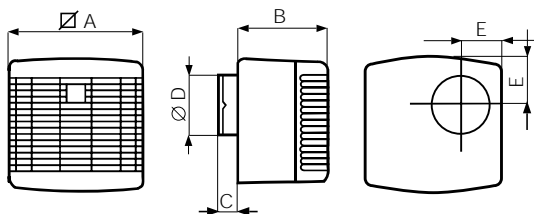

Vort Press LL	∅ A	B	C	∅ D	E
110	202	147	30	97	73
220	275	140	28	97	73

Product	Code		V ~ 50 Hz	W		A		Rpm		Delivery		P max		Lp dB(A) 3 m		Approvals	kg	Insulation	IP	°C max
		TIMER		max	min	max	min	max	min	max	min	max	min	max	min					
Vort Press 110 LL	11967	11968	220-240	24	12	0.22	0.07	1760	925	110 ⁽¹⁾ 30.6 ⁽²⁾	55 ⁽¹⁾ 15.3 ⁽²⁾	16 ⁽³⁾ 157 ⁽⁴⁾	10 ⁽³⁾ 98 ⁽⁴⁾	41	<30		1.95	cl.II	X4	40
Vort Press 220 LL	11977	11978	220-240	68	35	0.3	0.24	2060	1200	220 ⁽¹⁾ 61.1 ⁽²⁾	120 ⁽¹⁾ 33.3 ⁽²⁾	33 ⁽³⁾ 324 ⁽⁴⁾	32 ⁽³⁾ 314 ⁽⁴⁾	55	43		2.3	cl.II	X4	40

⁽¹⁾m³/h - ⁽²⁾l/s - ⁽³⁾mm H₂O - ⁽⁴⁾Pa

Conforms with ISO 3744 for noise and pressure levels