



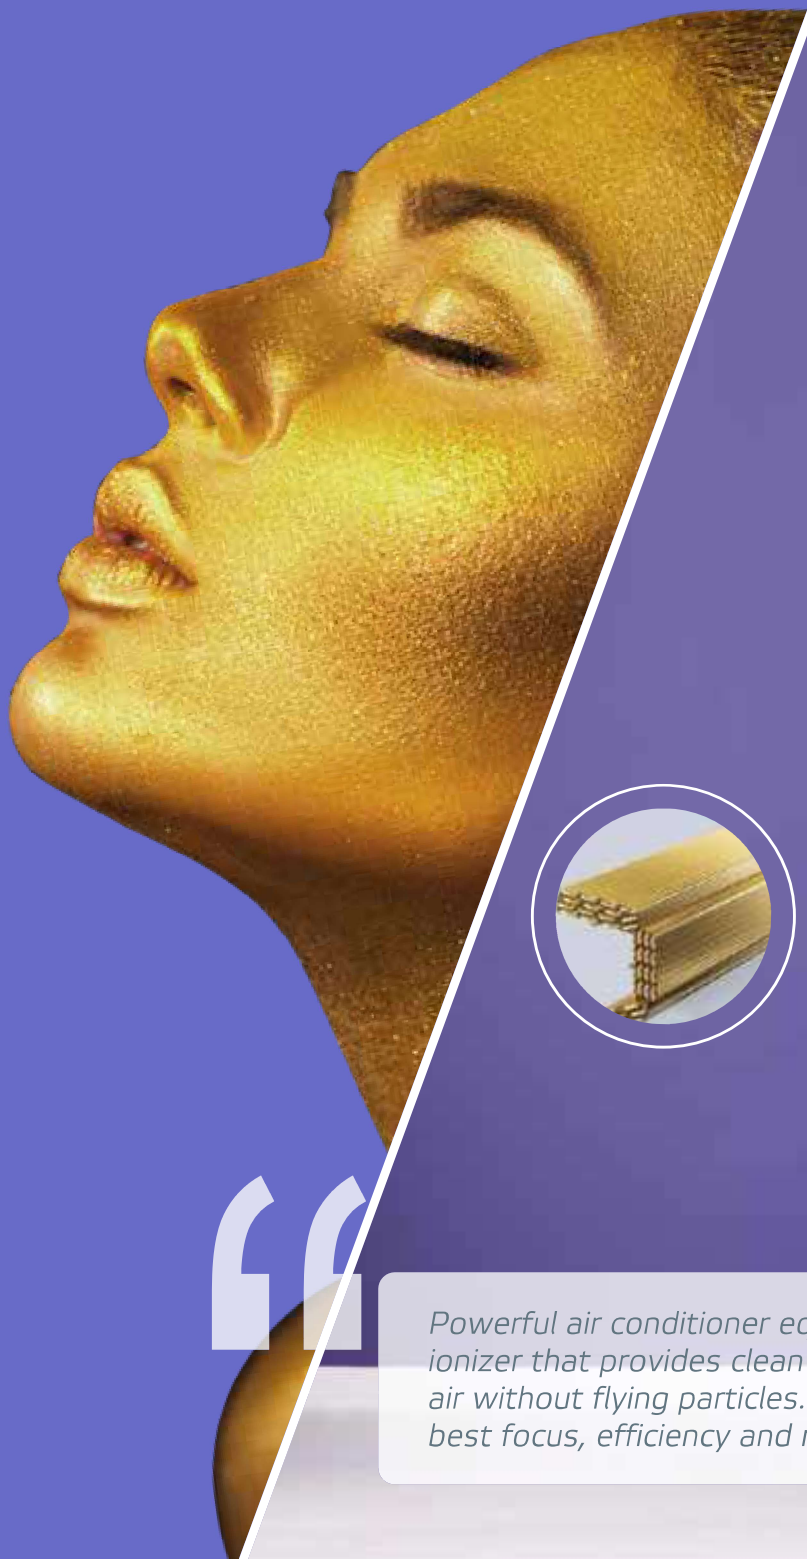

SAFE WITH GOLD

special anti-corrosion coating



ANTICORROSIVE
GOLD TRIM



“

Powerful air conditioner equipped with ionizer that provides clean and fresh air without flying particles. For the best focus, efficiency and results.

Model		ACP-12CH35AEVI R32	ACP-18CH50AEVI R410A
		ACP-12CH35AEVI Gold R32	
Capacity	Cooling	3517 (406~4443) W	5275 (1835~6120) W
	Heating	3810 (360~4357) W	5568 (1395~6741) W
Refrigerant		R32	R410A
Energy efficiency class	Cooling	A++	A++
	Heating	A+	A+
Energy Efficiency	SEER	6.7	6.6
	SCOP	4.1	4.0
Design load for heating	(P design h)	2700 W	4200 W
Input power	Cooling	1208 W	1643 W
	Heating	1340 W	1586 W
Airflow		≤530 m³/h	≤740 m³/h
Dehumidifying capacity		1.2 L/h	1.8 L/h
Sound pressure level	Indoor unit	21≤37.5 dB(A)	21≤42.5 dB(A)
	Outdoor unit	≤54 dB(A)	≤55 dB(A)
Sound power level	Indoor unit	≤37.5 dB	≤54 dB
	Outdoor unit	≤63 dB	≤63 dB
Outer Diameter of Liquid Pipe		1/4"	1/4"
Outer Diameter of Gas Pipe		3/8"	1/2"
Connection wire		5x1.5 mm²	5x1.5 mm²
Connection wire IU/OU ~220-240V/1/50Hz		3x1.5 mm²	3x1.5 mm²
Max. length of pipe		25 m	30 m
Max elevation		10 m	20 m
Standard length		5 m	5 m
Additional refrigerant		12 g/m	15 g/m
Wall bracket distance (outdoor)		487 mm	514 mm
Working range		-20°C≤T≤50°C	-20°C≤T≤50°C
Working range at cooling mode		-15°C≤T≤50°C	-15°C≤T≤50°C
Working range at heating mode		-20°C≤T≤30°C	-20°C≤T≤30°C
Net dimensions	Indoor unit	897 x 312 x 182 mm	1004 x 350 x 205 mm
	Outdoor unit	770 x 300 x 555 mm	800 x 333 x 554 mm
Net weight	Indoor unit	9.9 kg	13.5 kg
	Outdoor unit	27 kg	35.1 kg



V-DESIGN

VIVAX V DESING series is unique, light turns blue in cooling mode and red in heating mode



OFF



HEATING MODE



COOLING MODE

